

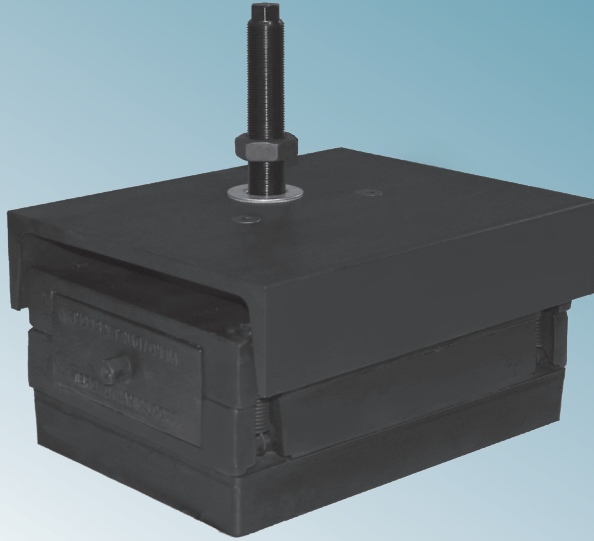
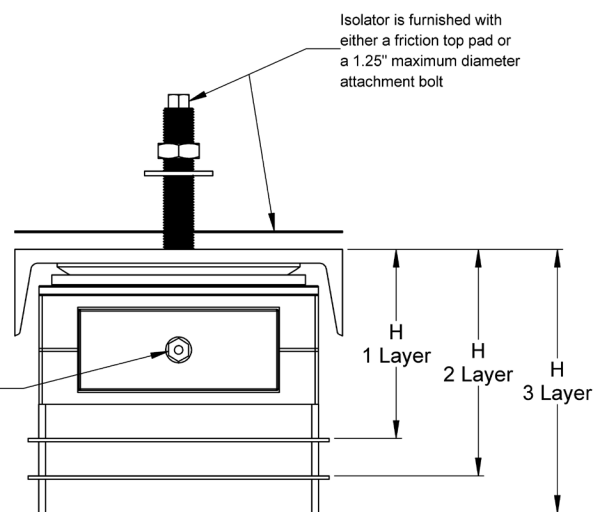


WEDGE MOUNTS: 16WH

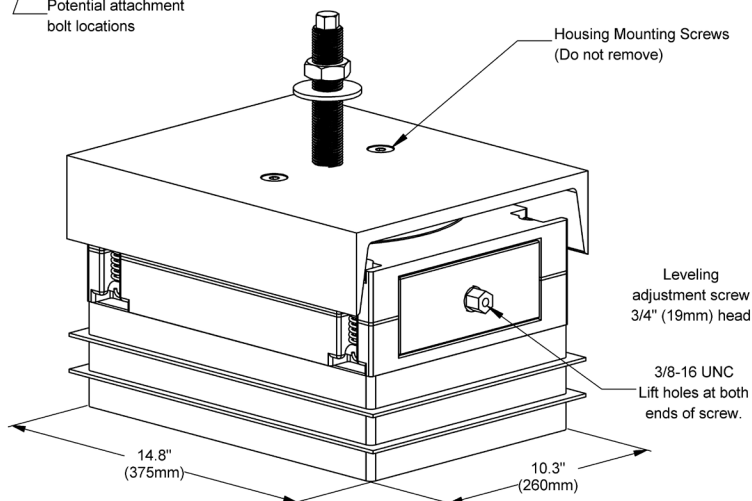


- Elastomer vibration & shock mount
 - protects environment against transmitted vibration & shock
 - protects sensitive equipment from incoming vibration & shock
 - faster, easier installations compared to grouting & anchoring
- Wedge-style leveling device
 - secures mount to machine foot
 - provides precision leveling
 - compensates for sloping floor with Glide-Ring® Damper
- Proprietary elastomer cushions
 - oil and chemical resistant
 - multiple hardness & thickness for better isolation effectiveness
 - neoprene, nitrile standard compounds
- Meets OSHA anchoring requirements

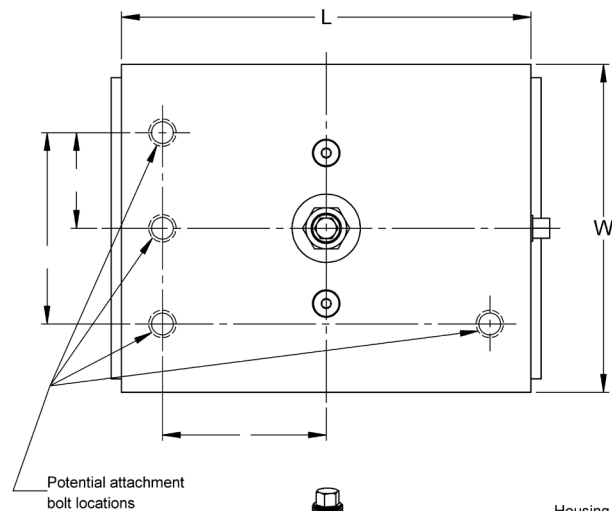

Isolator			L	W	H* ±1/8"			Weight (lbs)
Series		Model			Min	Max	Installed	
16WH	1 Layer	16WHM47	15	12	7.4	8.4	7.9	198
		16WHL62	15	12	7.0	8.0	7.5	195
		16WHK72	15	12	6.8	7.8	7.3	194
		16WHX80	15	12	6.5	7.5	7.0	191
16WH	2 Layer	16WHM472	15	12	9.3	10.3	9.8	224
		16WHL622	15	12	8.9	9.9	9.4	219
		16WHK722	15	12	8.7	9.7	9.2	216
		16WHX802	15	12	8.4	9.4	8.9	210
16WH	3 Layer	16WHM473	15	12	11.2	12.2	11.7	250
		16WHL623	15	12	10.8	11.8	11.3	245
		16WHK723	15	12	10.6	11.6	11.1	242
		16WHX803	15	12	10.3	11.3	10.8	236

* Use of Friction Pad adds 0.1" to Isolator Height.

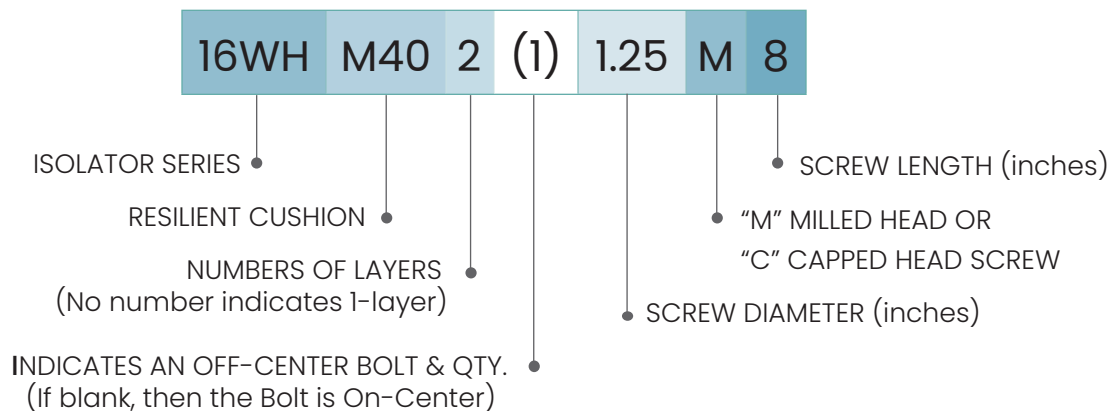

TYPICAL APPLICATIONS

- Die Casting Machines
- Injection Molding Machines
- Machining Centers
- Drilling & Milling Machines
- Cold Headers
- Presses, Mechanical
- Presses, Hydraulic
- Grinding Machines
- Lathes
- Drills & Boring Machines
- Transfer Lines
- Swagers
- Generators
- Saws
- Metal Container Machinery
- Pumps & Compressors

NOTE: Isolator data subject to change without notice.

05/07/2019