

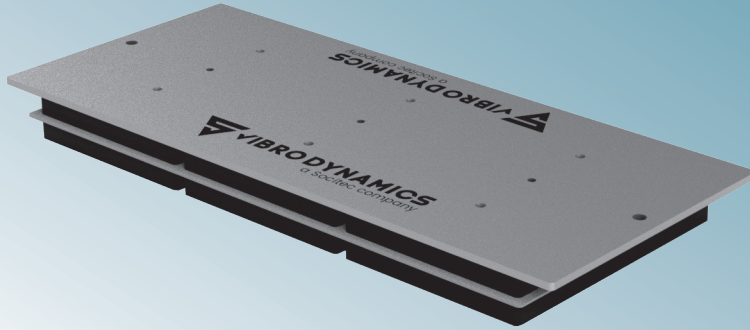


MODEL: 30MXBL & 31MXBL

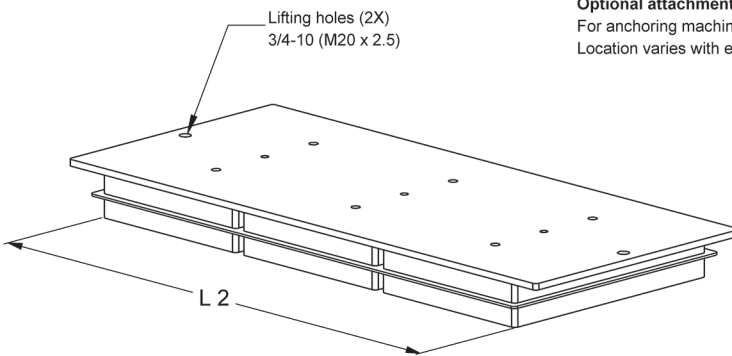


- Excellent isolation for effective control of vibration and shock.
- High-performance, multi-layer, modular elastomer construction.
- Shim leveling using metal shims supplied by Vibro/Dynamics.
- Large anchor bolts not required to keep machine from walking.
- Grout or sole plates are recommended, but usually not required due to wide foundation tilt and slope tolerance.

CUSTOM DESIGNS & SIZES ARE AVAILABLE

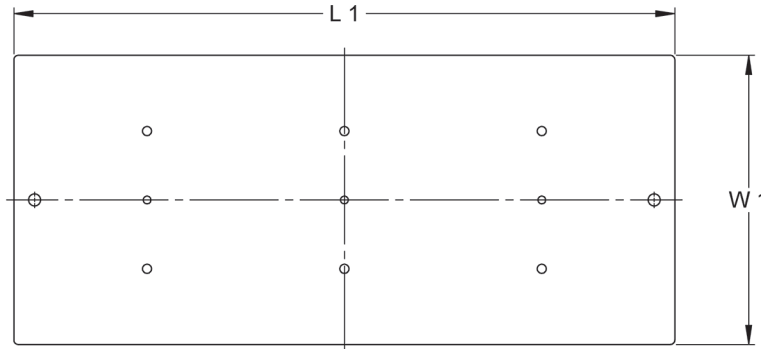


Optional attachment bolt

For anchoring machine to isolator.
Location varies with each order.

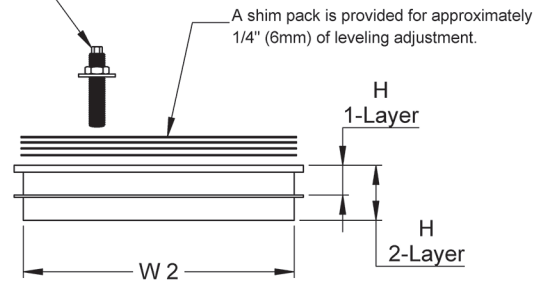

Isolator		L ₁	W ₁	L ₂	W ₂	H	Foundation Tolerances		Weight (lbs)	
Series	Model					Min. Installed Height (± 1/8")	Flatness (inches ±)	Slope (inches/foot)		
30MXBL	1 Layer	30MXBL1201	36.0	15.7	32.0	10.3	2.1	0.07	0.03	190
		30MXBL1431	36.0	15.7	32.0	10.3	2.2	0.07	0.03	190
		30MXBL1861	36.0	15.7	32.0	10.3	1.8	0.05	0.02	180
31MXBL		31MXBL2161	36.0	15.7	32.0	10.3	1.6	0.04	0.02	175
30MXBL	2 Layer	30MXBL1202	36.0	15.7	32.0	10.3	4.0	0.07	0.06	270
		30MXBL1432	36.0	15.7	32.0	10.3	4.1	0.07	0.06	270
		30MXBL1862	36.0	15.7	32.0	10.3	3.3	0.05	0.05	255
31MXBL		31MXBL2162	36.0	15.7	32.0	10.3	2.9	0.04	0.04	245

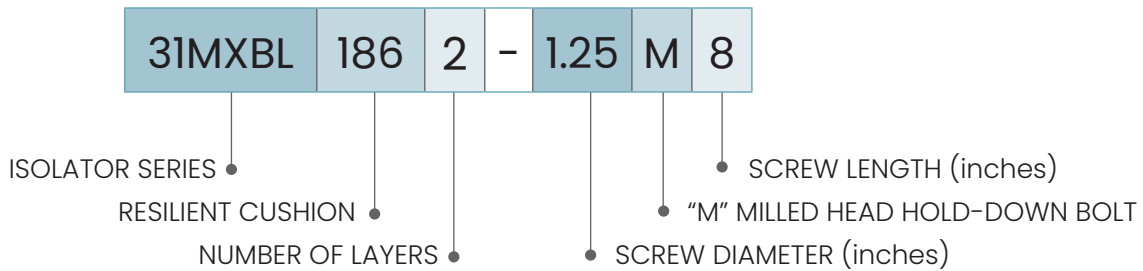

TYPICAL APPLICATIONS

- Presses, Mechanical
- Forging Presses
- Transfer Presses
- Hydraulic Presses
- Isolated Foundations
- Structures

NOTE: Isolator data subject to change without notice.

03/29/2019