


**ruggedized commercial racks** **series**  
**line "19 inches Cabinet"** **CAB**

**definition**



- Multidirectional anti-vibration/shock mounted 19 inches cabinets.
- Residual acceleration limited to 10g.
- Maximum static load 400kg.
- Type of protection up to IP40.
- Finite element calculation report on request.
- Many accessories : fans, lifting eyes, slide rails, drawers, doors, cable ducting, ...
- Great adaptability/versatility : Specials on request (materials, size and interfaces, etc.).

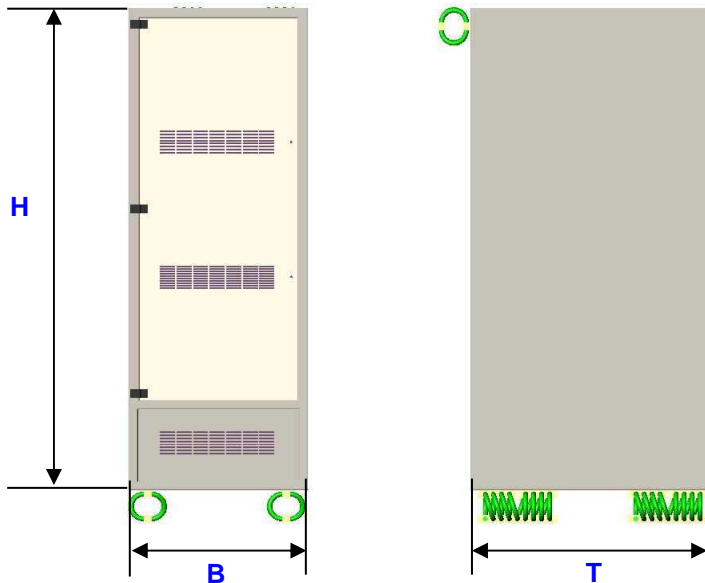

**Series**

Materials and finishes

**CAB**

**Wire rope isolators :**  
stainless steel cable  
aluminium alloy interfaces

**Elastomeric mountings :**  
polychloroprene  
corrosion protected steel  
interfaces

**Cabinets :**  
aluminium alloy/alodine  
alloy steel / zinc plate  
epoxy powder painting

**Dimensions**


H (mm)	B (mm)	T (mm)
25U (1210)	600	600
29U (1390)	700	800
34U (1610)	800	900
38U (1790)		
43U (2010)		
47U (2190)		

*Height from 20U to 47U available by 1U increment*  
*Depth from 500 to 900mm available by 25mm increment*

**Severity**

C	E	Payload mass (kg)		Standards & Specifications	
Wire rope isolators	Elastomeric mountings	1	50-100	a	15g11ms / 30g6ms
		2	100-150	b	IT9631
		3	150-200	c	BR3021 / BV043
		4	200-250	d	MIL-STD-901
		5	250-300		
		6	300-350		
		7	350-400		

*Other standards or specifications : consult us*

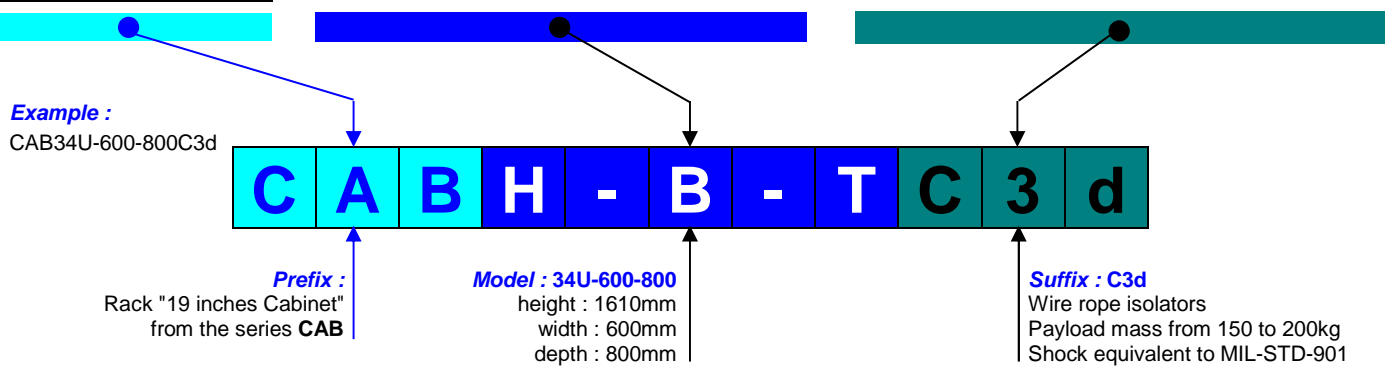

01/01/2003

Socitec  
 BP 33, 78501 Sartrouville cedex - France  
 Telephone : +33 (0)1 61 04 60 00  
 Fax : +33 (0)1 39 14 03 27  
 http://www.socitec.com  
 e-mail : shock-intl@socitec.com



Document subject to modification without prior notice