


WIRE ROPE ISOLATOR

series HH02

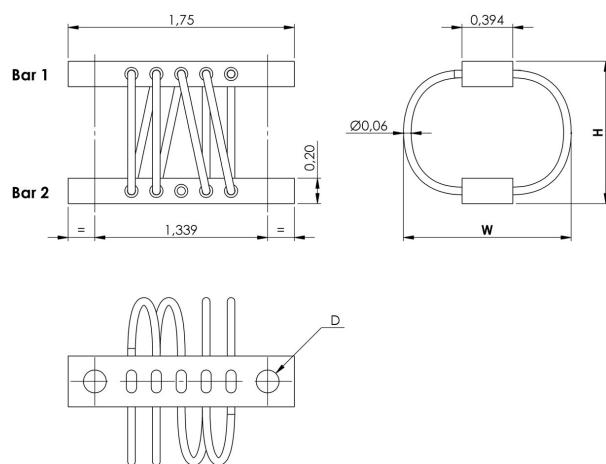

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range: -290° F to 570° F (-180° C to 300° C)
- Great adaptability/versatility

Specials on request
(material size and number of loops, etc.)

Dimensions are in inches. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
HH02
Cable: stainless steel
Retainer bars: aluminum alloy/ SurTec
Other materials on request

MODEL		height H (in)	width W (in)	weight (lbs)
-304		0.71	0.98	0.02
-404		0.79	1.1	0.02
-504		0.98	1.2	0.02
-604		1.1	1.3	0.02
-704		1.2	1.4	0.02
-804		1.3	1.5	0.04
-904		1.4	1.6	0.04
-1004		1.5	1.7	0.04


INTERFACES	Bar 1		
fixtures holes D	Ø 0.18 in. through holes	Ø 0.18 in. through holes countersunk 82°	8-32
Bar 2			
Ø 0.18 in. through holes	T2	not standard	not standard
Ø 0.18 in. through holes countersunk 82°	TC	C2	not standard
8-32	TI	CI	I2

H	H	0	2	-	3	0	4	C	I
---	---	---	---	---	---	---	---	---	---

SERIES: HH02
Half-Helical mount
from the HH02 series




MODEL: -304
height: 0.71 in.
width: 0.98 in.
weight: 0.02 lbs.
loops: series standard
is 04 loops

INTERFACE: CI
Ø0.18 in. through
holes countersunk
82° in bar 1,
8-32 in bar 2

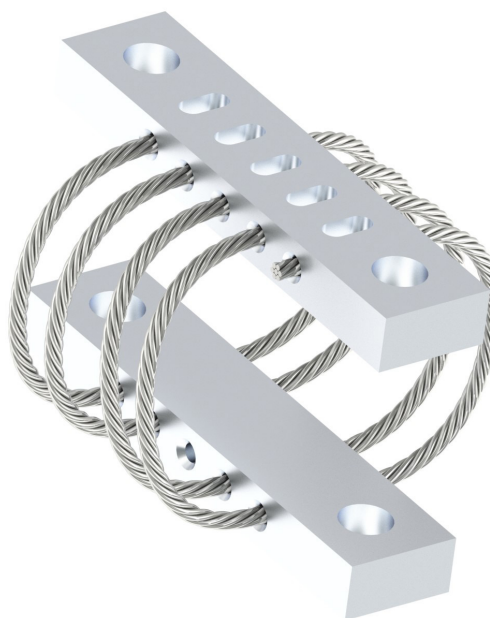

WIRE ROPE ISOLATOR

series HH02

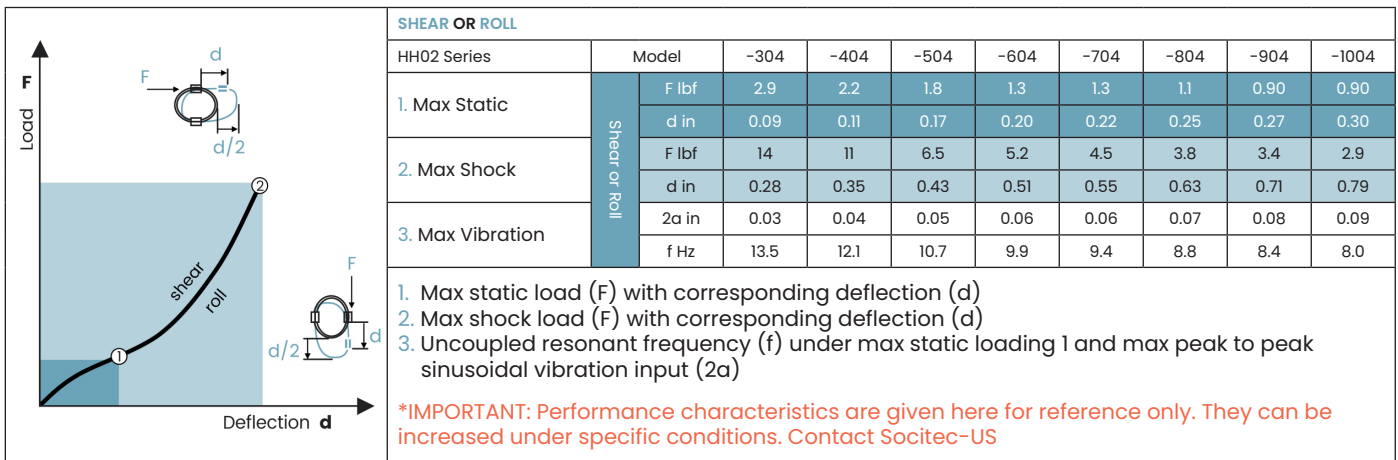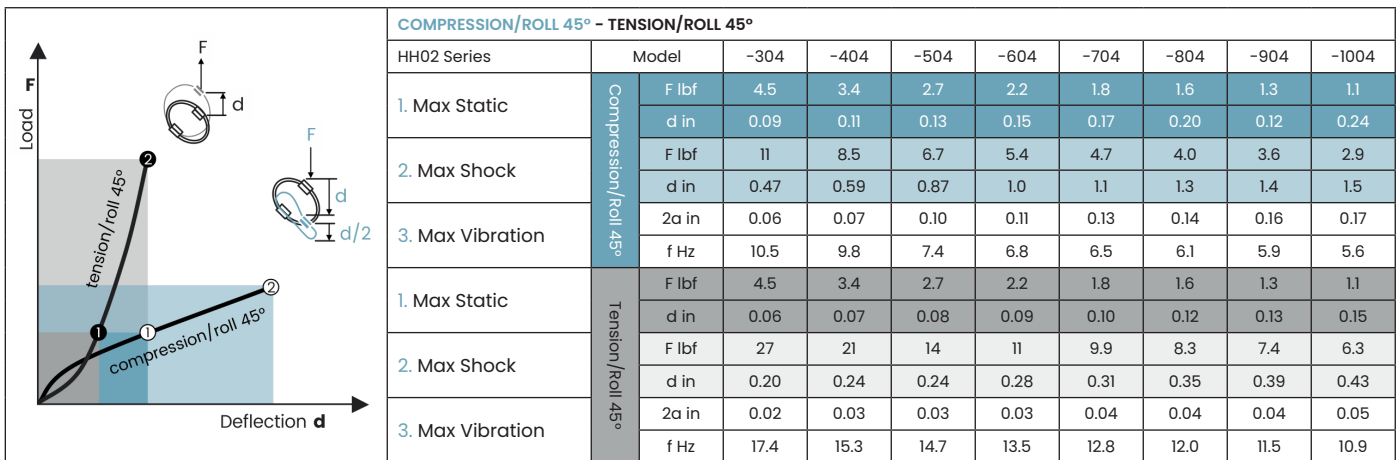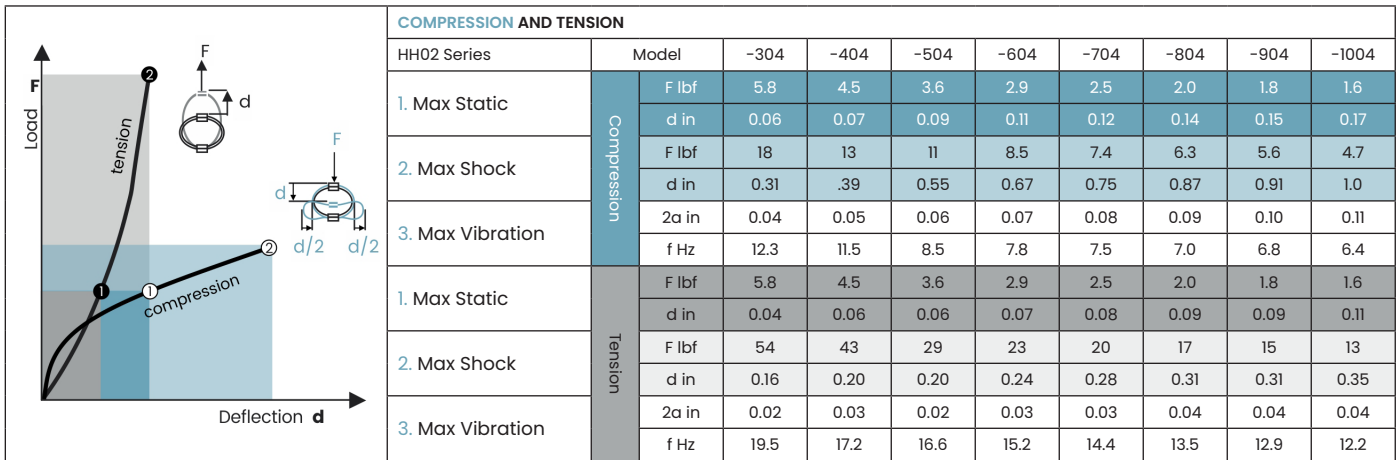

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air
Ground Forces
Marine
Others

AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
 GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
 GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
 GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C

NOTE: Isolator data subject to change without notice

12/09/25



Socitec US LLC
 2443 Braga Drive, Broadview, IL 60155
 tel.: 800-842-7668 • contact-web@socitec.com
 www.socitec-us.com