


MODEL: MP20A SERIES



- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Superior temperature range: -290°F to +570°F
- Great adaptability/versatility
- Custom materials and sizes available

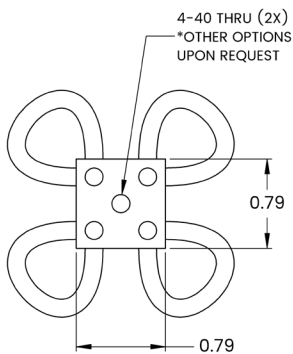



M	P	2	0	A	-	4	6	I	2
---	---	---	---	---	---	---	---	---	---

Prefix:
'polycal' isolator
from the MP00 series

*Fixture hole
option

-46	1.00	1.65	0.88
-----	------	------	------

Model	height H (in)	width W (in)	weight (ozf)
-46	1.00	1.65	0.88
-48	1.20	1.85	1.02
-52	1.45	2.00	1.09



TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Ground Forces

GAM EG13A, SEFT 001, MIL-STD-810, VG 95332.

Air

AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810.


Marine

GAM EG13C, IT25-21/96-31/15-86, MIL-S-901, STANAG 042, BV 043.73, BV 044.


Others

GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C


MODEL: MP20A SERIES

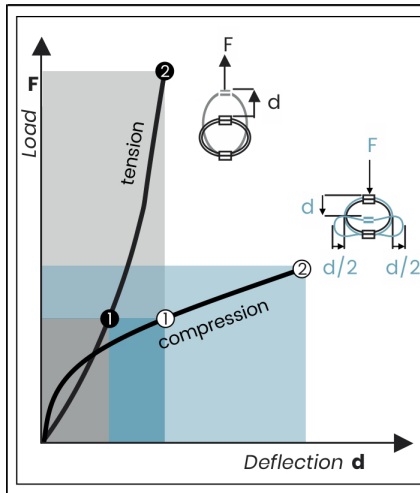

MP20A Series		Compression and Tension				
		Model		-46	-48	-52
① Max Static	Compression	F	lbf	6.6	5.2	4.8
		d	in	0.06	0.10	0.16
② Max Shock		F	lbf	20	16	14
		d	in	0.33	0.51	0.74
③ Max Vibration		2a	in	0.04	0.06	0.08
		f	Hz	15	12	9.6
① Max Static	Tension	F	lbf	6.6	5.2	4.8
		d	in	0.06	0.10	0.16
② Max Shock		F	lbf	37	35	45
		d	in	0.39	0.60	0.86
③ Max Vibration		2a	in	0.04	0.07	0.09
		f	Hz	15	12	10

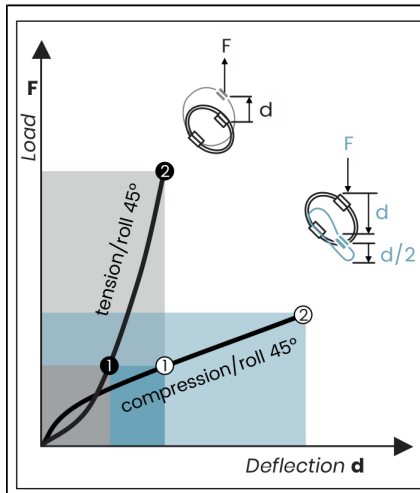

MP20A Series		Compression/Roll 45° and Tension/Roll 45°				
		Model		-46	-48	-52
① Max Static	Comp/Roll 45°	F	lbf	5.0	3.9	3.6
		d	in	0.08	0.14	0.21
② Max Shock		F	lbf	14	11	9.5
		d	in	0.50	0.77	1.1
③ Max Vibration		2a	in	0.05	0.08	0.12
		f	Hz	12	9.9	8.2
① Max Static	Tension/Roll 45°	F	lbf	5.0	3.9	3.6
		d	in	0.08	0.14	0.21
② Max Shock		F	lbf	20	19	24
		d	in	0.44	0.69	0.98
③ Max Vibration		2a	in	0.05	0.08	0.11
		f	Hz	13	11	9.3

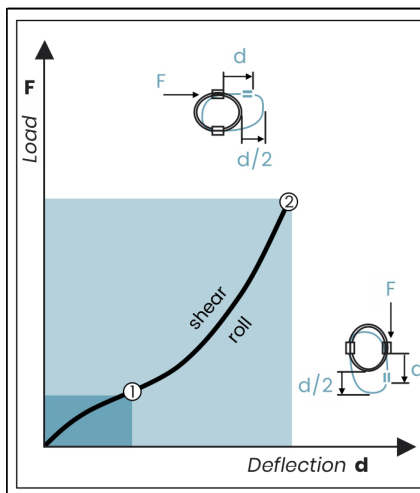

MP20A Series		Shear or Roll				
		Model		-46	-48	-52
① Max Static	Shear or Roll	F	lbf	3.3	2.6	2.4
		d	in	0.11	0.19	0.28
② Max Shock		F	lbf	15	13	14
		d	in	0.44	0.69	0.98
③ Max Vibration		2a	in	0.05	0.08	0.11
		f	Hz	12	9.6	8.2

1. Max static load (F) with corresponding deflection (d)

2. Max shock load (F) with corresponding deflection (d)

3. Uncoupled resonant frequency (f) under max static loading and max peak to peak sinusoidal vibration input (2a)

IMPORTANT: Performance characteristics are given here for reference only. They can be increased under specific conditions. Contact Vibro/Dynamics.

NOTE: Isolator data subject to change without notice.

10/10/2019