


WIRE ROPE ISOLATORS: **SPRING POLYCAL**

DEFINITION
series RP46

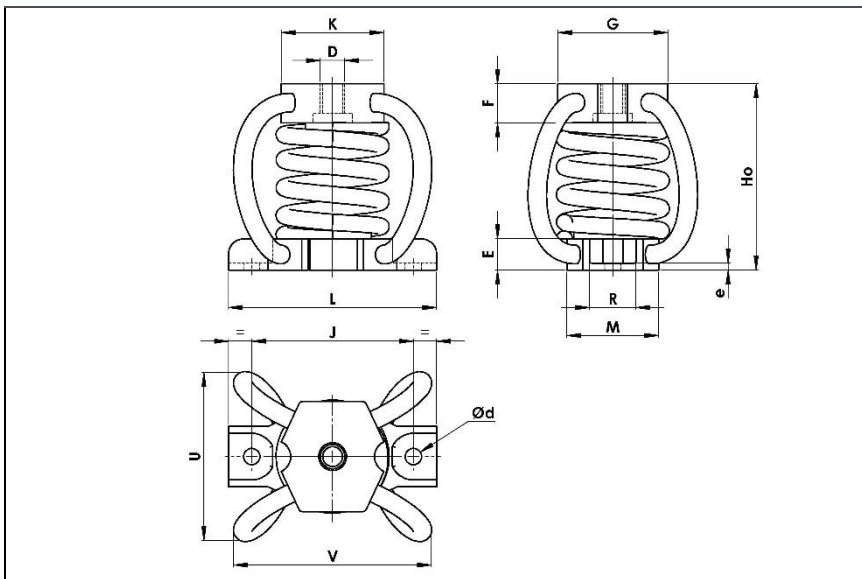

- All metal low frequencies anti-vibration mounts for vertical loading
- Exceptional reliability and long life
- High damping at resonance
- No ageing
- Corrosion resistant
- Unequalled temperature range: -180°C +300°C
- Great adaptability / versatility

Dimensions are in mm. For reference only.

SERIE
Materials and finishes (meets RoHs requirements)
RP46 Cable: Stainless steel AISI 316 Interfaces: Aluminium alloy Spring: High tensile steel paint or phosphate coating Inserts: Stainless steel

MODEL																		
Frequency 4 to 6 Hz	Ho	U max	V max	Ød	J	D	E	e	F	G	K	L	M	R	Static load (daN)		Dynamic vibration level	Mass (kg)
															Mini	Maxi		
RP46-01	64,5	55	64	5,8	49,4	M8	10,5	3	11	35	39	60,4	29	14	4	7	20 mm/s	0,09
RP46-02	64,5	55	64	5,8	49,4	M8	10,5	3	11	35	39	60,4	29	14	6	12		0,10
RP46-03	65,5	55	65	5,8	49,4	M8	10,5	3	12	35	39	60,4	29	14	10	20		0,12
RP46-04	65,5	55	65	5,8	49,4	M8	10,5	3	12	35	39	60,4	29	14	12	25		0,12
RP46-05	65,5	55	65	5,8	49,4	M8	10,5	3	12	35	39	60,4	29	14	16	33		0,13
RP46-11	90	84	101	7	69,4	M10	13,5	3	15,5	47,3	44	89,4	39	20	23	48		0,33
RP46-12	90,5	83	100	7	69,4	M10	13,5	3	16	47,3	44	89,4	39	20	43	92		0,41
RP46-13	90,5	83	100	7	69,4	M10	13,5	3	16	47,3	44	89,4	39	20	65	142		0,44
RP46-14	91,3	84	101	7	69,4	M10	13,5	3	16,8	47,3	44	89,4	39	20	88	190		0,47
RP46-21	119,8	103	128	9	89,6	M12	19	4	23,8	61,5	61	118	52	28	114	245		1,04
RP46-22	119,8	103	128	9	89,6	M12	19	4	23,8	61,5	61	118	52	28	162	353		1,13
RP46-23	119,8	103	128	9	89,6	M12	19	4	23,8	61,5	61	118	52	28	198	433		1,17

EXAMPLE
RP46-13

R	P	4	6	-	1	3
---	---	---	---	---	---	---

PREFIX:
 'Spring polycal'
 mount from the
RP46 series

MODEL: -13
 height: 90,5mm
 length: 83mm
 width: 100mm
 static load: 65 to 142 daN
 mass: 0,44kg

