

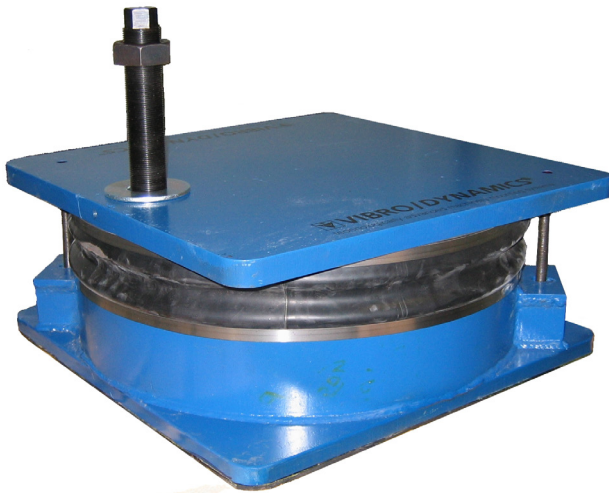
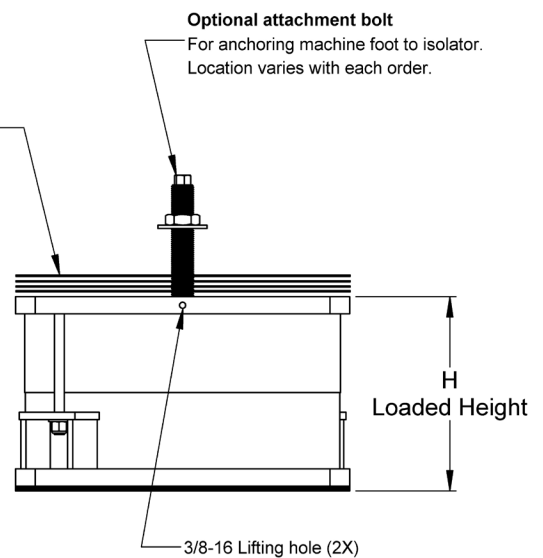


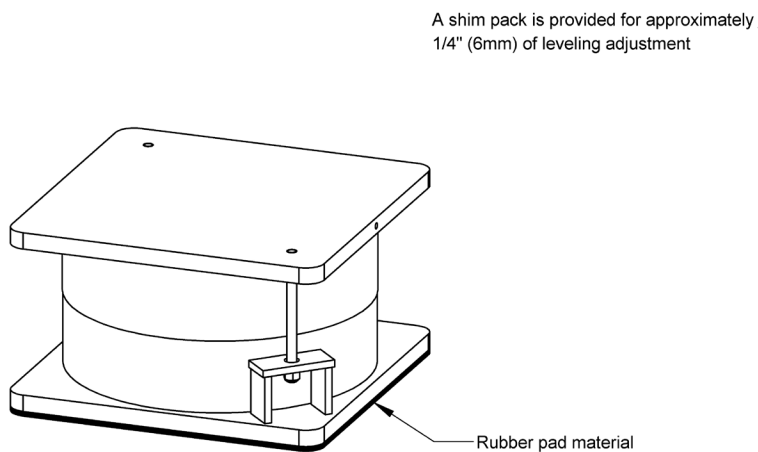


- Ultimate control of vibration and shock transmission
- Viscous damping
- 4.0-7.0 Hz natural frequency
- Shim leveling
- Grout or sole plates are recommended

CUSTOM DESIGNS & SIZES ARE AVAILABLE

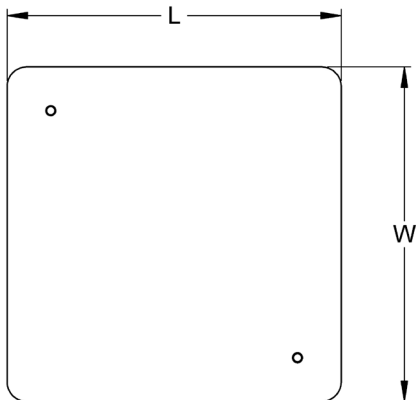

MODEL: SVXN16 SERIES

Model Number	L	W	H ±0.2"	Maximum Static Load		Foundation Flatness Tolerance ±	Foundation Slope Tolerance inch/foot	ESTIMATED WEIGHT	
				Lbs	kN			Lbs	Kg
SVXN1604-13-04	17.0	17.0	9.3-9.6	44,000	196	0.03	0.08	290	132
SVXN1607-13-06	19.0	19.0	9.3-9.6	66,000	294	0.03	0.07	385	175
SVXN1607-13-07	19.0	19.0	9.3-9.6	77,000	343	0.03	0.07	404	183
SVXN1609-13-08	21.0	21.0	9.3-9.6	88,000	391	0.03	0.06	469	213
SVXN1609-13-09	21.0	21.0	9.3-9.6	99,000	440	0.03	0.06	488	221

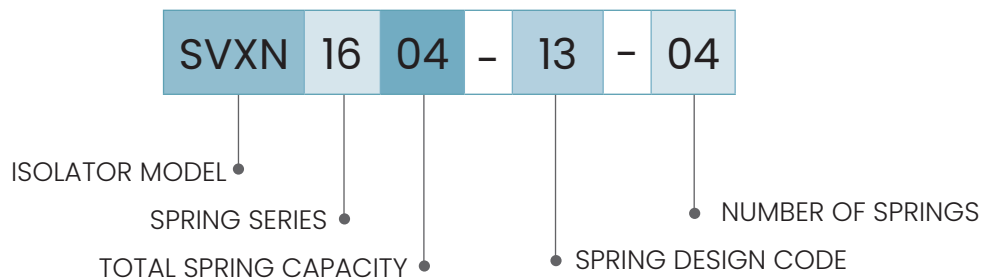

TYPICAL APPLICATIONS

- Stamping Presses
- Turbines
- Hydraulic Presses
- Pumps, Blowers
- Forging Presses
- Building isolation
- Mills
- Centrifuges

NOTE: Isolator data subject to change without notice.

12/17/2019