



MODEL: SVXN33 SERIES

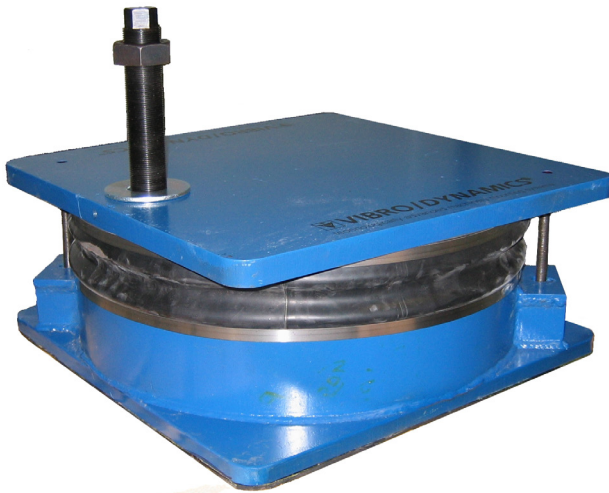


- Ultimate control of vibration and shock transmission
- Viscous damping
- 4.0-7.0 Hz natural frequency
- Shim leveling
- Grout or sole plates are recommended

CUSTOM DESIGNS & SIZES ARE AVAILABLE

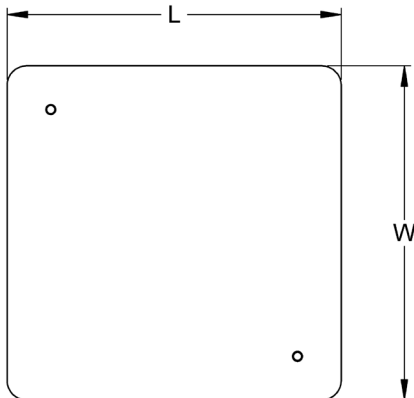


A shim pack is provided for approximately 1/4" (6mm) of leveling adjustment

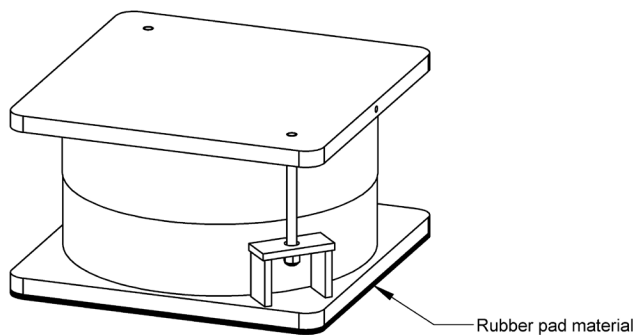


Optional attachment bolt

For anchoring machine foot to isolator.
Location varies with each order.

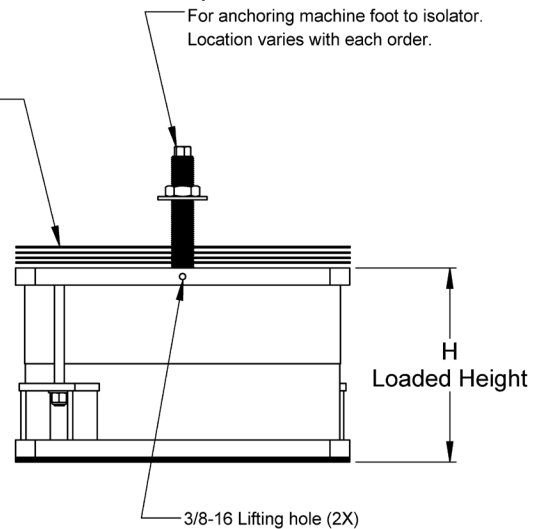

Model Number	L	W	H ±0.2"	Maximum Static Load		Foundation Flatness Tolerance ±	Foundation Slope Tolerance inch/foot	ESTIMATED WEIGHT	
				Lbs	kN			Lbs	Kg
SVXN3304-14-04	19.0	19.0	8.1-8.4	53,000	236	0.03	0.04	353	160
SVXN3307-14-06	21.0	21.0	8.1-8.4	80,000	354	0.03	0.03	457	207
SVXN3307-14-07	21.0	21.0	8.1-8.4	93,000	431	0.03	0.03	484	220

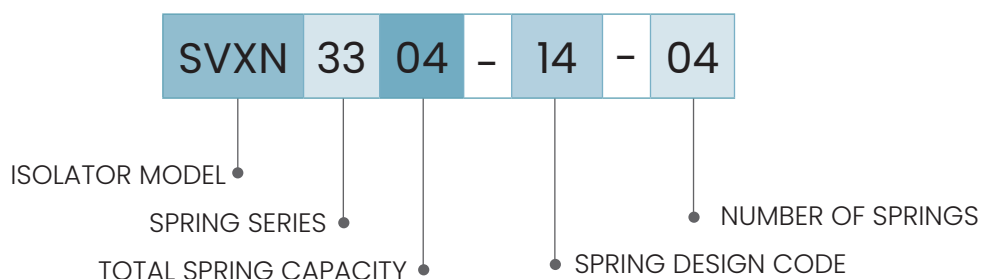

TYPICAL APPLICATIONS

- Stamping Presses
- Hydraulic Presses
- Forging Presses
- Mills
- Turbines
- Pumps, Blowers
- Building isolation
- Centrifuges

NOTE: Isolator data subject to change without notice.

12/18/2019