


WIRE ROPE ISOLATOR

DEFINITION
series HH04

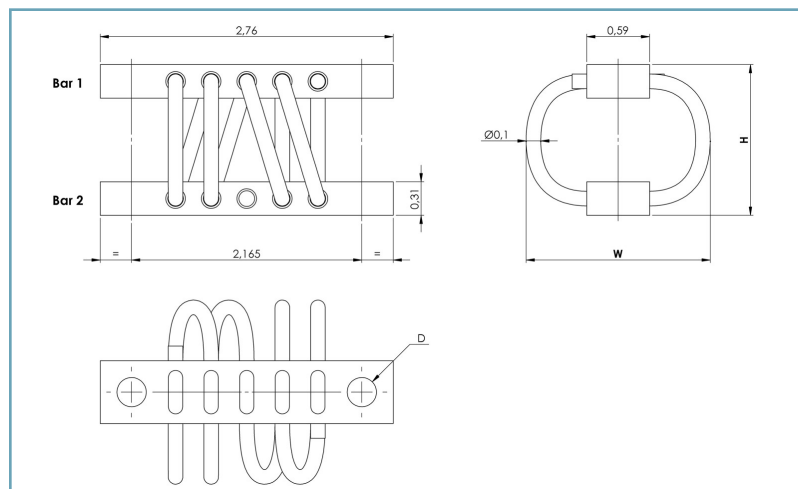

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range: -290° F to 570° F (-180° C to 300° C)
- Great adaptability/versatility

Specials on request
(material size and number of loops, etc.)

Dimensions are in inches. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
HH04
Cable: stainless steel
Retainer bars: aluminum alloy/ SurTec
Other materials on request

MODEL	height H (in)	width W (in)	weight (lbs)
-304	1.1	1.5	0.11
-404	1.2	1.5	.011
-504	1.3	1.7	0.13
-604	1.4	1.7	0.13
-704	1.5	1.9	0.13
-804	1.6	1.9	0.13
-904	1.7	2.0	0.13
-1004	2.0	2.4	0.15
-1104	2.1	2.5	0.15
-1204	2.1	2.8	0.15
-1304	2.2	3.1	0.15

INTERFACES			
fixtures holes D	Bar 1		
	ø 0.28 in. through holes	ø 0.28 in. through holes counter- sunk 82°	1/4-20
Bar 2			
ø 0.28 in. through holes	T2	not standard	not standard
ø 0.28 in. through holes countersunk 82°	TC	C2	not standard
1/4-20	T1	C1	I2

H	H	0	4	-	3	0	4	C	I
---	---	---	---	---	---	---	---	---	---

SERIES: HH04
Half-Helical mount
from the HH04 series




MODEL: -304
height: 1.1 in.
width: 1.5 in.
weight: 0.11 lbs.
loops: series standard
is 04 loops

INTERFACE: CI
ø0.28 in. through
holes countersunk
82° in bar 1,
1/4-20 in bar 2



WIRE ROPE ISOLATOR

DEFINITION
series HH04

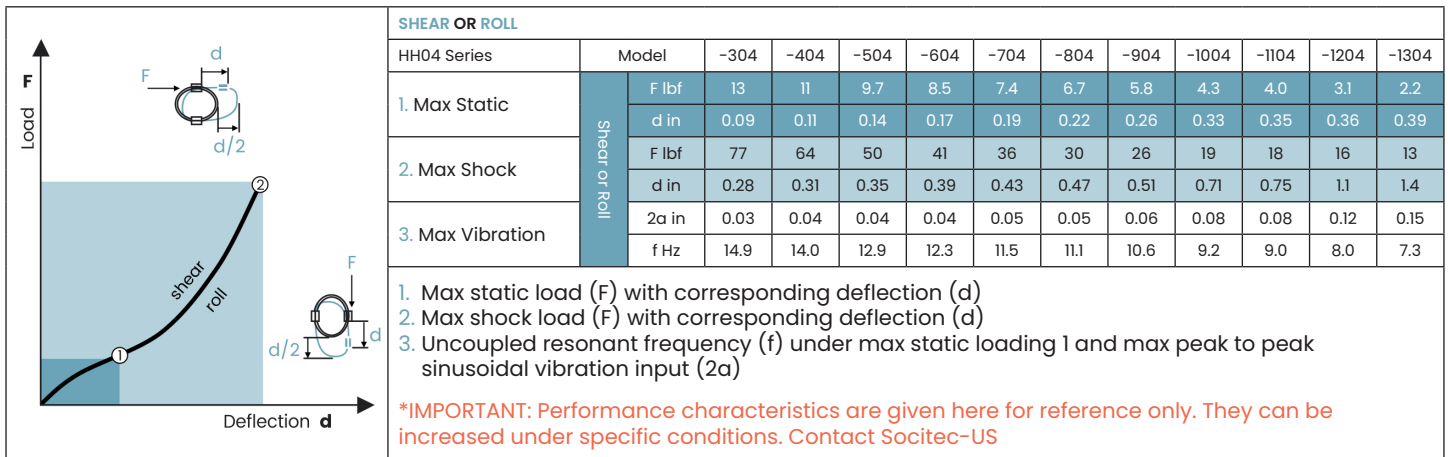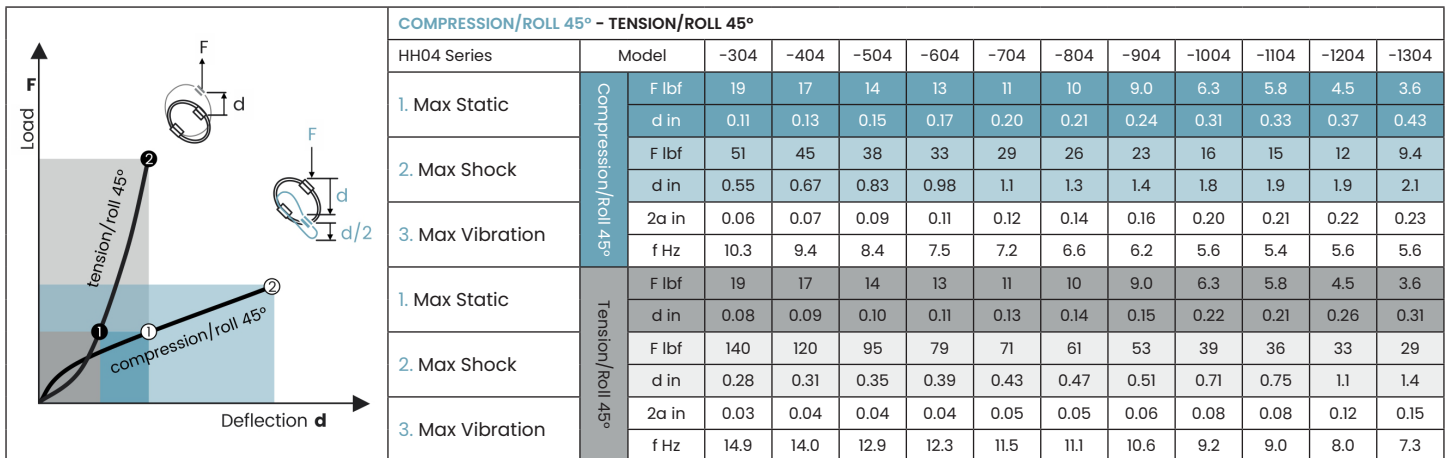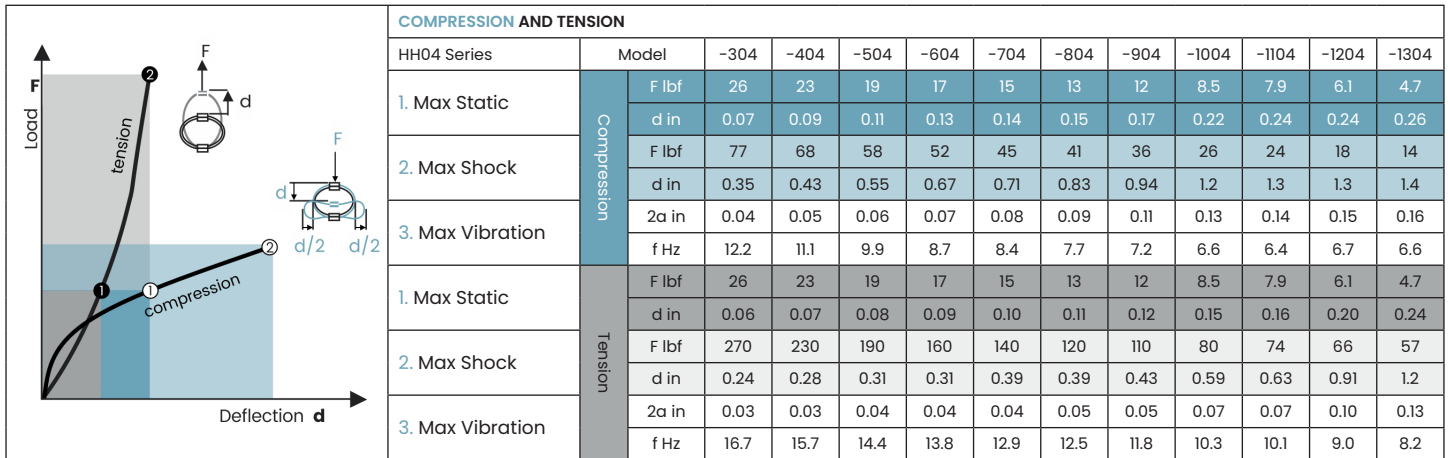

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
 Ground Forces GAM EGI3A, SEFT 001, MIL-STD-810, VG 9533
 Marine GAM EGI3C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
 Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C

NOTE: Isolator data subject to change without notice



12/09/25
 Socitec US LLC
 2443 Braga Drive, Broadview, IL 60155
 tel.: 800-842-7668 • contact-web@socitec.com
 www.socitec-us.com